


## IPCIE-UART-2D2P

PCIe card supports four RS-232/422/485 Port, RoHs

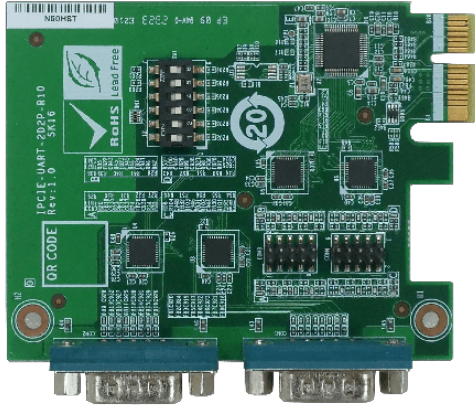

## Features

- » PCIe card supports four RS-232/422/485 Port
- » 128 bytes transmit/receive FIFO
- » High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- » Baud rate supports 115.2K, max. up to 1.5M

## Specifications

| Form Factor              |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| Form Factor              | PCI Express® x1                                                                                      |
| System                   |                                                                                                      |
| Chipset                  | Fintek F81504 (PCI Express Bridge to Quad Serial Port),<br>Fintek F81439 (Buffer/Transceiver Series) |
| Physical Characteristics |                                                                                                      |
| Dimensions (LxWxH) (mm)  | 70mm x 90mm                                                                                          |
| Net Weight               | GW: 120g / NW: 80g                                                                                   |
| I/O Interface            |                                                                                                      |
| I/O Interface            | 2 x External RS-232/422/485 : DB-9<br>2 x Internal RS-232/422/485 : pin header (2x5 pin, P=2.0)      |
| Environment              |                                                                                                      |
| Operating Temperature    | 0°C ~ 60°C                                                                                           |
| Storage Temperature      | -30°C ~ 70°C                                                                                         |
| Humidity                 | 5% ~ 95%, non-condensing                                                                             |
| Certifications           |                                                                                                      |
| Safety & EMC             | CE/FCC compliant                                                                                     |

## Ordering Information

|                     |                                                   |
|---------------------|---------------------------------------------------|
| IPCIE-UART-2D2P-R10 | PCIe x1 card supports 4-Port RS-232/422/485, RoHs |
|---------------------|---------------------------------------------------|

## Packing List

|                          |                                    |
|--------------------------|------------------------------------|
| 1 x IPCIE-UART-2D2P card | 1 x Half height bracket            |
| 2 x D-SUB9 male cable    | 1 x QIG (Quick Installation Guide) |